

RM223

2U Cost-Effective Industrial Server Chassis



Rear View



Features & Benefits

- Utilized 5.25" & 3.5" bays with Chenbro storage kits
- Dust-preventing & easy-swap fan filter
- Support low profile or standard rear window
- PS/2 PSU for cost-saving
- Tylersburg solution compliance


Specification

Model Name	• RM22300
M/B Form Factor	• ATX (12" x 9.6")
Dimension (D×W×H)	• 493 mm x 422 mm x 88 mm • 19.4" x 16.6" x 3.5"
Drive Bay	• External : 5.25" x 1, 3.5" x 1 • Internal : 3.5" x 4
PSU	• Form Factor : PS/2 • Watt : 400 W
Indicator	• 1 x Power Status LED, 1 x HDD Activity LED, 1 x LAN Activity LED
Front Control	• Power ON/OFF, System Reset
System Security	• Intrusion Switch
Cooling Fan	• Front : 2 x 80 mm front fans • Middle : N/A • Rear : 1 x 60 mm rear fan, Optional 2 x 40 mm rear fans
Slot Opening	• 3 x full height or 6 x low profile
Metal Thickness	• 1.2 mm
Net Weight (Chassis only)	• 7 Kg
Gross Weight (w/Packing)	• 10 Kg
Backplane	• N/A
Rear Window	• Low Profile or Standard
Front Bezel	• Optional
Cubic Feet	• 3.03
Container Info. (Single Packing)	• 20' : 324 • 40' : 678 • 40'H : 829

Inside View



Front View

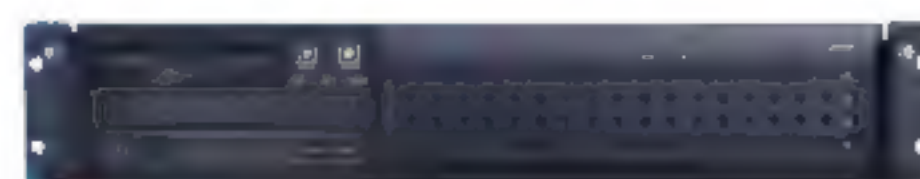

1 x 5.25" bay for ODD or storage kits



1 x 3.5" bay for FDD or 2.5" HDD with SK51201



Easy-swap fan filter



4 x internal 3.5" bays for 3.5" or 2.5" HDD with SK41203



PS/2 PSU



Changeable rear window for low profile